FXX-D S

1 / 10 DRIFT CHASSIS

SETUP SHEET

ORIGINAL SETTING

DATE : _____ SURFACE : _____ NOTE : _____

TRACK : _____ GRIP : _____

Caster



■ 8°
□ 12°
□ 16°

Front wheel hubs



Battery position options

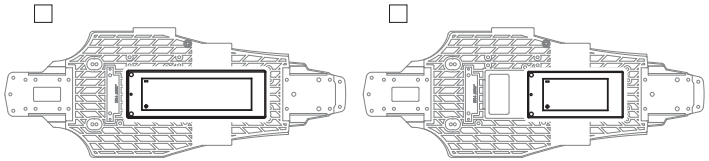

Rear wheel hubs



FRONT / REAR

Tire:_____ Tire:_____

Wheel:_____ Wheel:_____

Offset:_____ Offset:_____

Front damper stay

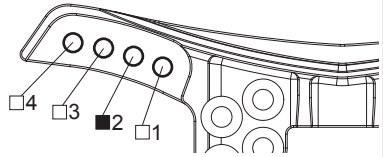

Front upright

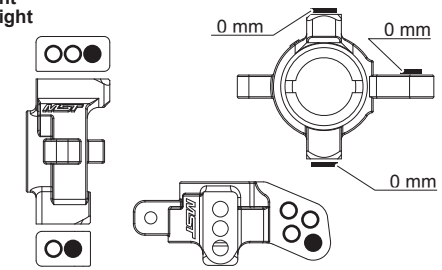

Rear upright



Rear damper stay

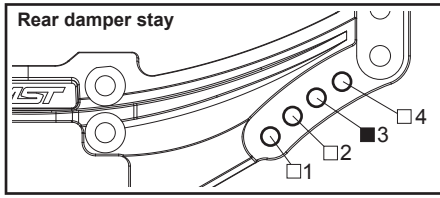

Rear diff



□ Gear diff
Diff oil_____



■ Spool



□ Alum spool

Camber: 4°
Toe-in: 0°

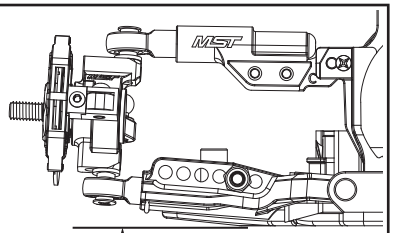

Ride height: 5 mm GROUND

Camber: 5°
Toe-in: -3°

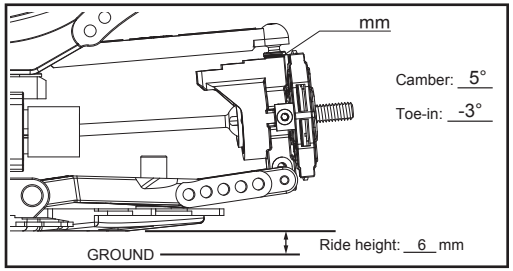

GROUND Ride height: 6 mm

Front rollcenter

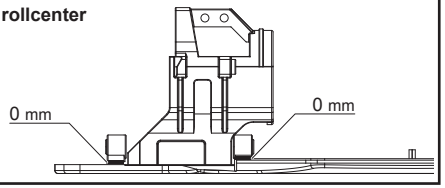

Rear rollcenter

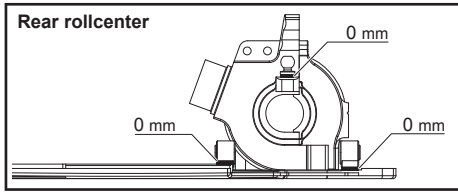

Front lower arm

□1 □2 □3 □4 ■5 □6



Rear lower arm



□1 □2 □3 ■4 □5

Suspension mount

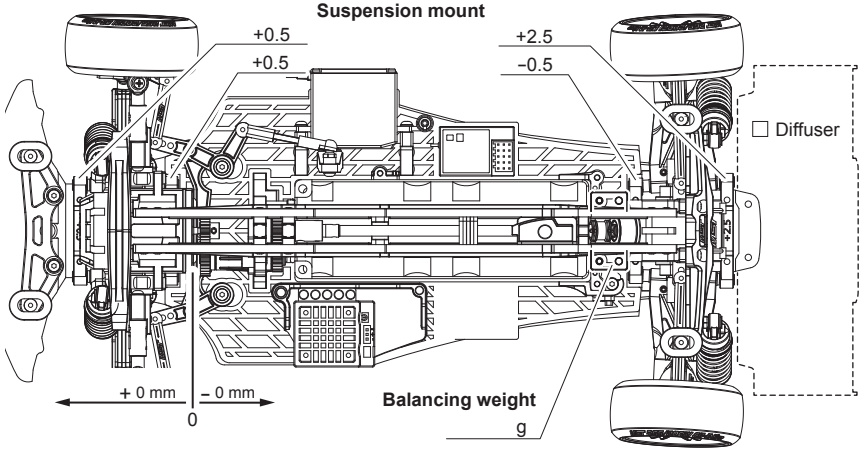

Motor Position: 0 mm

Front damper

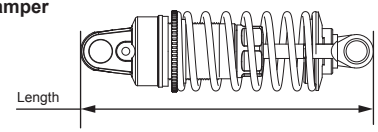

Shock oil: #300 Spring color: silver
Length: 63 mm Piston: Ø1.2 mm
Spring: 29 mm Ø1.4 Piston hole: 3

Rear damper

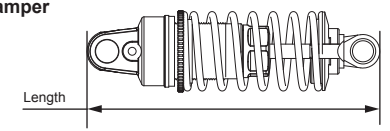

Shock oil: #300 Spring color: red
Length: 63 mm Piston: Ø1.2 mm
Spring: 29 mm Ø1.2 Piston hole: 3

Ballast:

_____
_____
_____
_____
_____
_____

Gear A × Gear C × Big Bevel Gear ÷ Gear B ÷ Small Bevel Gear ÷ Pinion Gear = Gear ratio

28T × 36T × 36 T ÷ 20T 17 T ÷ =T _____

Motor & ESC: _____ **Battery:** _____